

PURE

Connected smoke detector

Netsecur



Connected

Be alerted on your smartphone in the event of a fire alarm



Design

Facilitates acceptance of the detector by occupants

Powerful audible alarm


85 dB at 3 metres to quickly alert occupants

Rip-off protection

Lockable mounting base to reduce the risk of detector removal in rental accommodation

8-hour beep delay

Temporarily silences fault beeps until detector is replaced

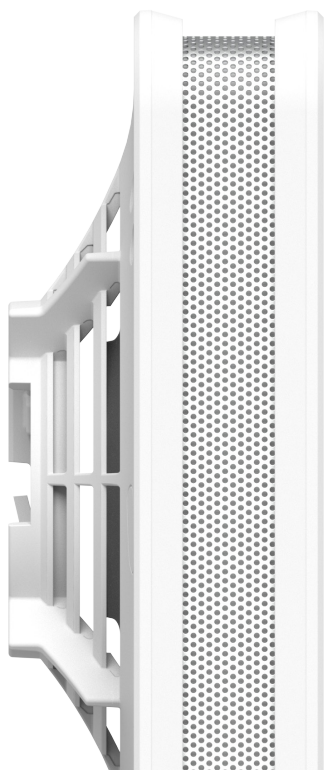

Test / Silence button

Easily accessible front panel button

Silence function

Stops the alarm and/or puts the detector on standby for 10 minutes without removing it from its base

Compact mounting base

Only 3 cm in diameter to avoid damaging the installation surface



PURE

Connected smoke detector

Netsecur

www.netsecur.com

Reference	Battery	Radio
N860ZB	5 years ⁽¹⁾	Zigbee



Net weight: 150 g (including battery and stand)

FUNCTIONS



Insect barrier

Pest protection grid integrated into the detector



Signal light

Discreet LED indicator in standby mode, powerful in alarm mode



Air 360°

Exclusive detection technology. Simplifies maintenance by occupants

FEATURES

Smoke

Technology : Photoelectric smoke detector
Optical smoke detection by diffused light (Tyndall effect)

Connectivity



Content box

1 sensor
1 CR123 battery
1 mounting base
2 nylon screws and plugs
1 user manual

Conditions of use

Indoor environment
Temperature: 4°C to +45°C
Humidity: 0% RH to 99% RH (non-condensing)

Mounting type

Wall or ceiling

Warranty ⁽²⁾

2 years

Certification

EN14604



Mostly recyclable
recyclable

⁽¹⁾ The battery is designed for a non-guaranteed life of 5 years: battery life may vary. Please refer to the «Precautions and Limitations» section of the user manual. ⁽²⁾ Please refer to the «Warranty» section of the user manual.