

FIRST

Smoke detector

Netsecur



Design

Facilitates acceptance of the detector by occupants



10-year battery⁽¹⁾

Sealed and welded lithium battery

Powerful audible alarm


85 dB at 3 metres to quickly alert occupants

Rip-off protection

Lockable mounting base to reduce the risk of detector removal in rental accommodation

8-hour beep delay

Temporarily silences fault beeps until detector is replaced

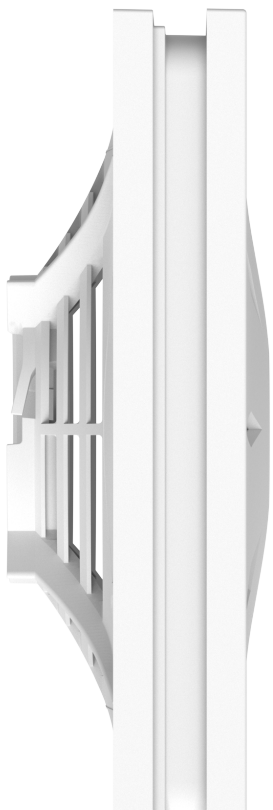

Test / Silence button

Easily accessible front panel button

Silence function

Stops the alarm and/or puts the detector on standby for 10 minutes without removing it from its base

Compact mounting base

Only 3 cm in diameter to avoid damaging the installation surface




FIRST

Smoke detector

Netsecur

www.netsecur.com

Reference	Battery
N730FW	10 years

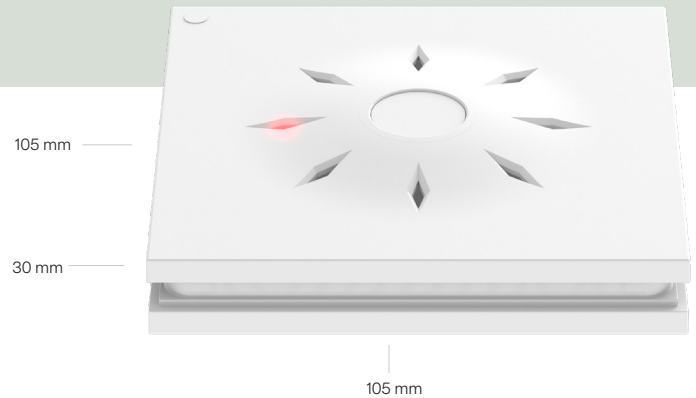

Net weight: 150 g (including battery and stand)

FUNCTIONS



Signal light

Discreet LED indicator in standby mode, powerful in alarm mode



Air 360°

Exclusive detection technology. Simplifies maintenance by occupants



Insect barrier

Pest protection grid integrated into the detector

FEATURES

Smoke

Technology : Photoelectric smoke detector
Optical smoke detection by diffused light (Tyndall effect)

Conditions of use

Indoor environment
Temperature: 4°C to +45°C
Humidity: 0% RH to 99% RH (non-condensing)

Mounting type

Wall or ceiling

Content box

1 detector
1 mounting base
2 nylon screws and plugs
1 user manual

Certification

EN14604



Warranty ⁽²⁾

2 years

⁽¹⁾ The battery is designed for a non-guaranteed life of 10 years; battery life may vary. Please refer to the «Precautions and Limitations» section of the user manual. ⁽²⁾ Please refer to the «Warranty» section of the user manual.