

ORIGIN

Smoke detector

Discover product in details



Connected

Remote maintenance without entering the home



Interconnection

Up to 25 interconnected sensors and accessories



Design

Facilitates acceptance of the detector by residents

Nexelec

Digital detector logbook


QR Code + application for monitoring installation and maintenance of a fleet of detectors

Electronic maintenance certificate

After each maintenance operation, a unique certificate is recorded in the detector's secure NFC chip

Anti-tear detection

Triggers an alert message in the application if the detector is removed from its mounting base

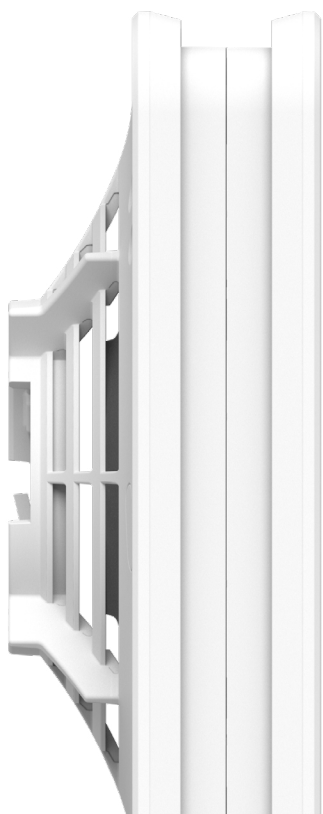

Compatible with 3M adhesive mounting⁽¹⁾

CE and NF approved for installation without screws or plugs. No need to drill hazardous substrates (asbestos)

Universaly compatible mounting base⁽¹⁾

Simplifies replacement of other brands of detectors without drilling new mounting holes

Rip-off protection

Lockable mounting base to reduce the risk of detector removal

Reduce false alarms

Electronic self-compensation for dust in the detection chamber

Remote surveillance compatible⁽¹⁾

To report fire alarms, remove doubts or request on-site intervention by an approved company



ORIGIN

Smoke detector

Nexelec

www.nexelec.eu

Reference	Battery	Radio
X865LS	10 years	LoRaWAN - Sigfox



Net weight: 150 g (including battery and stand)

FUNCTIONS



10-year battery⁽²⁾

Sealed and welded lithium battery



Air 360°

Exclusive detection technology. Simplifies maintenance by residents

TEST

Test/Silence button

Large, easy-to-reach touch button on front panel



Silence function

Stops the alarm and/or puts the detector on standby for 10 minutes without removing it from its base



Compact mounting base

Only 3 cm in diameter to avoid damaging the installation surface



Insect barrier

Pest protection grid integrated into the detector



Signal light

Discreet LED indicator in standby mode, powerful in alarm mode



Powerful audible alarm

85 dB at 3 metres to quickly alert occupants



8-hour beep delay

Temporarily silences fault beeps until detector is replaced

FEATURES

Smoke

Technology: Photoelectric smoke detector
Optical smoke detection by diffused light (Tyndall effect)

Choice of connectivity



Set contents

1 detector
1 mounting base
2 nylon screws and plugs
1 user manual

Terms of use

Indoor environment
Temperature: -10°C to +50°C
Humidity: 0% RH to 99% RH (non-condensing)

Mounting type

Wall or ceiling

Warranty⁽³⁾

5 years

Certification

EN14604



⁽¹⁾ Optional accessory or function available on request ⁽²⁾ The battery is designed for a non-guaranteed life of 10 years: battery life may vary. Please refer to the «Precautions and Limitations» section of the user manual.

⁽³⁾ Please refer to the «Warranty» section of the user manual.