

REMOTE+

Remote control for stand-alone detectors

Discover product in details



Controls smoke and carbon monoxide detectors

Remote control of ceiling-mounted detectors

Nexelec



General remote control

A single remote control can operate all the detectors in a building



Silence function

Stops the alarm and/or puts the detector on standby for a few minutes from the remote control

Long-range radio


Allows detectors to be tested or stopped up to 100 m in an open field

Always at hand

Compact, easy-to-carry remote control

Remote control of detector operation

No need to enter homes to access the detector, the remote control makes it easy to test products

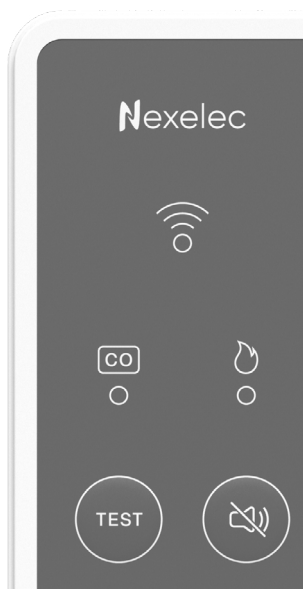

REMOTE+

Remote control for stand-alone detectors

Nexelec

www.nexelec.eu



Net weight: 41 g (including battery and stand)

Reference	Radio Frequency
A155LT	EU868 MHz

FUNCTIONS



3-years battery ⁽¹⁾

Replaceable lithium battery. Up to 3 years autonomy

FEATURES

Terms of use

Indoor environment
Temperature: -10°C to +50°C
Humidity: 0% RH to 100% RH (non-condensing)

Mounting type

Wall-mounted or free-standing

Box content

1 product
1 CR2032 battery
1 magnetic holder with adhesive
adhesive 3M

Warranty ⁽²⁾

2 years

Mostly recyclable product

Certification



Power supply

Replaceable CR2032 lithium battery

Compatible detector models

Smoke detectors:
ORIGIN / ORIGIN+ / GUARD / GUARD+
CO detectors: AIR / AIR+

⁽¹⁾ The battery is designed for a non-guaranteed life of 3 years; battery life may vary. Please refer to § «Precautions and Limitations» ⁽²⁾ Please refer to the «Warranty» section of the user manual